





Gina

14W 827/845/860 800lm WH-SI

Gina Work point luminaire 14W 2700/4500/6000K
800lm Dim Touch and Dim; Protection cl. III; L70B50
30000h; LED not exchangeable; CRI>80; Housing al;
Colour wh/sil; Cover Plastic, opal

14W 827/845/860 800lm WH-SI

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4118736	A1GIAH	1.01	Gina

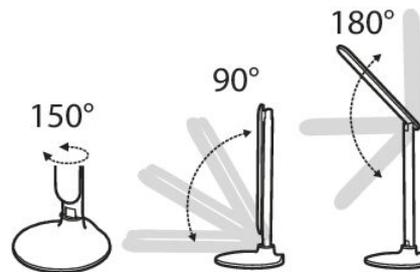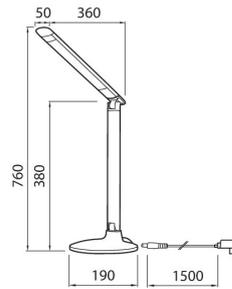

Mounting	
Type of luminaire	Desk luminaire
Mounting method	Stand (base)
Suitable for wall mounting	No
Fit for workplace acc. EN 12464-1	No
Electrical connection with connector system	Yes

Structure	
Adjustable	Yes
Bendable	No
Adjustable height	Yes
Lamp type	LED not exchangeable
Light source included	Yes
Suitable for number of lamps	1
Lamp holder	Other
Housing material	Aluminium
Housing colour	Silver
Cover material	Plastic, opal
Cover colour	White
With switch	Yes
With socket outlet	No
Energy efficiency class of light source according to EU regulation 2019/2015	F

Dimming and control	
Dimmable	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming LineSwitch	No
Dimming mains voltage modulation	No
Dimming manufacturer's proprietary system	No
Dimming trailing edge	No
Dimming leading edge	No
Dimming potentiometer (integrated)	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	Yes
Dimming with push-button	No
Dimming Zigbee	No
No dimming function	No
With dimmer	Yes
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No

Photometric data	
Light distributor	None
Effective luminous flux (lm)	800
Colour of light (alphanumeric)	White
Colour temperature (min) (K)	2700
Colour temperature (max) (K)	6000
Colour rendering index (CRI/Ra)	80-89
Colour temperature switchable	Discrete positions
Lumen setting adjustable	Positions
Beam angle adjustable	No

Lifetime and capacity	
Rated life time L70/B50 at 25 °C (h)	30000

Measurements	
Width (mm)	190
Height/depth (mm)	760

Electrotechnical data	
Voltage type	AC
Protection class according to IEC 61140	III
Suitable for lamp power (min) (W)	14
Suitable for lamp power (max) (W)	14
Maximum system power (W)	14