



IP66 IK08 40W/740 Asym GLC GR



The Flood range offers cost-efficient, durable lighting solutions for demanding applications. The luminaires have an impact rating of IK08. With the asymmetric models, you can create high-quality area lighting for car parks, sports fields and yards. The luminaires are quick and easy to install without the need to remove the handle. A fixture for mounting the luminaire on a \varnothing 60 mm pole is available as an accessory.

Flood Floodlight 40W 4000K 5400lm Beam angle Extreme wide beam $>80^\circ$; No dim; IP66; IK08; Protection cl. I; L70B50 100000h; LED not exchangeable; CRI $>$ 70; SDCM5; Ending; 3x1.5mm²; Housing al; Colour gr; Cover Glass transparent; C16 max. 24



IP66 IK08 40W/740 Asym GLC GR

PRODUCT CODE	CODE	KG	PRODUCT FAMILY
4513135	A5VAHB	4.8	Flood

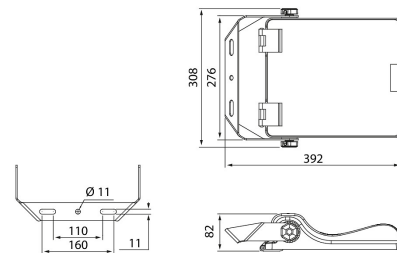

Mounting	
Degree of protection (IP)	IP66
Suitable for ceiling mounting	Yes
Luminaire may be covered with thermally insulating material	blank
Suitable for pedestal/floor mounting	Yes
Suitable for traverse mounting	Yes
Luminaire with limited surface temperature, class "D" in acc. with EN 60598-2-24	No
Suitable for surface mounting	Yes
Impact strength	IK08
Suitable for clamp-mounting	Yes
Suitable for light-track mounting	No
Suitable for built-in mounting	No
Fit for monitor workplace	No
Connection type	Screwless terminal
Suitable for suspended mounting	No
Number of poles	3
Conductor cross section (mm ²)	1.5
Connectable conductor cross section (min) (mm ²)	1
Connectable conductor cross section (max) (mm ²)	2.5
Type of wiring	Ending
Suitable for low voltage cable system	No
Suitable for wall mounting	Yes
Max. number of luminaires per miniature circuit breaker C16	24
Max. number of luminaires per miniature circuit breaker B16	14
Quantity of luminaires for MCB C16:	24
Quantity of luminaires for MCB B16:	14

Structure	
With lamp	Yes
Colour housing	Grey
Material housing	Aluminium
Material cover	Glass transparent
Lamp type	LED not exchangeable
Suitable for number of lamps	1
Lamp holder	Other
Adjustability	Swivelling
Control gear included	Yes
Reflector	None
Surface brushed	No
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Emergency power supply integrated	No
Exchangeable control gear	Yes

Dimming and control	
With movement sensor	No
With light sensor	No
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI-2	No
Dimming DALI	No
Dimming DMX	No
Dimming potentiometer (integrated)	No
Dimming GPRS	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
No dimming function	Yes
Dimming depending on control gear	No
Dimming DSI	No
Constant luminous flux control	No
IFTTT support available	No
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No

Photometric data	
Luminous flux (min) (lm)	5400
Colour temperature (min) (K)	4000
Beam angle	Extreme wide beam >80°
Colour rendering index CRI	70-79
Effective luminous flux (lm)	5400
Light outlet	Direct
Light sharing	Asymmetric
Colour of light (alphanumeric)	White
Colour temperature (max) (K)	4000
Luminous flux (max) (lm)	5400
Colour consistency (McAdam ellipse)	SDCM5
Photobiological safety according to EN 62471	RG1
Light distributor	Focal lens
Colour temperature switchable	No
Luminous flux adjustable	No
Beam angle adjustable	No

Lifetime and capacity	
Rated life time L70/B50 at 25 °C	100000
Rated life time L80/B10 at 25 °C	60000
Rated ambient temperature acc. IEC62722-2-1 (min) (°C)	-30
Rated ambient temperature acc. IEC62722-2-1 (max) (°C)	25
Lumen maintenance at median useful life of 35,000 hrs at 25 °C ambient (tq)	90
Lumen maintenance at median useful life of 50,000 hrs at 25 °C ambient (tq)	85
Lumen maintenance at median useful life of 100,000 hr at 25 °C ambient (tq)	70
Failure rate at median useful life of 35,000 hrs at 25 °C ambient (tq)	5
Failure rate at median useful life of 50,000 hrs at 25 °C ambient (tq)	5
Failure rate at median useful life of 100,000 hrs at 25 °C ambient (tq)	10

Measurements	
Length (mm)	359
Width (mm)	308
Height/depth (mm)	82

Electrotechnical data	
Type of control gear	LED operating device current-controlled
Voltage type	AC
Nominal voltage (min) (V)	220
Protection class	I
Suitable for lamp power (min) (W)	40
Maximum system power (W)	40
Nominal voltage (max) (V)	240
Suitable for lamp power (max) (W)	40
Luminaire efficacy (lm/W)	135
Power factor	0.9